



Dynamic analysis of soil pile structure interaction in soft clay by small scale model test on shake table

Dinesh Bhuva¹, Prof. Narendra Pokar² Prof. B. J. Panchal³

¹M.E, Structural Engineering, HJD Institute of Technical Education and Research-Kera Kutch

²Assistance Professor, Civil Engineering department, HJD Institute of Technical Education and Research-Kera Kutch

³Associate Professor, applied mechanics department, L.D .Collage of Engineering, Ahmedabad

Abstract—Seismic behavior of structures built on soft soils is influenced by the soil properties and the foundation type, where the response is significantly different from the fixed base condition owing to the interaction between the ground and the structure. The aim of present work is to understand the behavior of soil pile structure interaction RCC framed low rise structure by experimental study. Two bay Ground plus 4 stories RCC framed structure is considered for the soil pile structure interaction behavior study. Small scale model is derived, constructed and tested in laboratory on shake table. Acceleration time history, recorded at building at Gandhidham – Kanda highway on 26th January 2001 Bhuj Earthquake, is considered as an input motion for acceleration time history of ground. Fix based structure and Structure supported by end-bearing pile foundation of experimental results are compared.

Keywords-Seismic behavior, Soil pile structure interaction (SPSI), Lateral displacement, Story drift, Small scale model.

I. INTRODUCTION

The scarcity of land compels engineers to construct buildings at locations with less favourable geotechnical conditions in seismically active regions. Numerous midrise buildings have been built in earthquake prone areas employing different types of foundations. In the selection of the foundation type for the mid-rise buildings, several options such as shallow foundation, pile foundation, or pile-raft foundation, might be considered by design engineers to carry both gravity and earthquake loads. However, different types of foundations behave differently during the earthquake considering the soil-structure interaction (SSI) that may influence the seismic behaviour of the superstructure. Figure 1.1 displays a building structure that has been collapsed in an earthquake as a result of soil pile structure interaction. In order to prevent such collapse, seismic demands must be determined accurately.



Figure 1. Failure due to soil pile structure interaction (SPSI)

There are many reasons for collapse of buildings during earthquake but history of earthquake shows that one of the major reasons is soil pile structure interaction (SPSI) effect. It is essential that behaviour of soil pile structure interaction (SPSI) should be understood clearly under earthquake loading. Small scale modelling and testing is one of the best tools for this. But history of earthquake photo shows that the one measure reason is soil pile structure interaction (SPSI) effect. When we carry out a test, we often use models instead of full-scaled objects (prototypes). The reasons for using models are Civil Engineering structures being giant in size are difficult to test. So to make testing easy small scaled model are used. Small scale models are easy to build, install and test in a Laboratory. Although it may be difficult to model all details, many times there is no alternative to use models. Small scale models give accurate results within elastic range.

II. SMALL SCALE MODEL

A structural model is defined as “any physical representation of a structure or a portion of a structure.” The use of small-scale models by engineers and builders dates many hundreds and even thousands of years. However, these early models were primarily aids for planning and constructing structures and were not useful for predicting deformations and strengths of prototypes. Similitude is a tool to establish the sufficient and necessary condition of similarity between models and prototypes, using which test setup is adjusted. It helps to understand under laying principles for proper

design, construction and result interpretation. The theory of similitude includes a consideration of the condition under which the behaviour of two separate entities or systems (model and prototype) will be similar. The similarity is essentially proportionality. Following two figures are geometrically similar with following relation.

Table 1. Scale factor for different quantity

Items	Physical Quantity	Actual parameter(mm)	Small scale model(mm)	volume(m3)	weight(kg)
CONTAINER	Diameter(D)	9000	600		
	Internal dia (d)	-	596	0.002253264	17.688122
	Depth	-	600		
	Thickness	-	2		
BASE PLATE	Length	7500	500		
	Width	7500	500		
	Height	-	-	0.0015	11.775
	Thickness	-	6		
STOREY PLATE	No of base plate	-	1		
	Length	6000	400		
	Width	6000	400		
	Height	-	-	0.008	62.8
COLUMN	Thickness	150	10		
	No of storey plate	-	5		
	Length		10		
	Width		10		
PILE	Height	15000	1000	0.0004	3.14
	Thickness	-	-		
	No of column	-	4		
	Diameter(D)	360	24		
PILE	Depth	9045	603	0.00109061	2.6174638
	No of pile	-	4		

III. SHAKING TABLE TESTS MODEL COMPONENTS

The developed soil-structure model for shaking table tests have four main components including the model structure, the model pile foundations, the soil container, and the soil mix. Employing geometric scaling factor of 1:15, height, length, and width of the structural model are determined to be, 1 m, 0.40 m, and 0.40 m, respectively. The model structure, the model pile is subjected to the competing scale model criteria.

The model piles have a diameter of 24 mm with L/d ratio of 25. Model pile is made from RCC M30 grade concrete having diameter of model pile is 24 mm and depth of pile is 600 mm considered. The ideal soil container should simulate the free field soil response by minimising boundary effects. Since the seismic behaviour of the soil container affects the interaction between the soil and structure, the performance of the soil container is of the key importance for conducting seismic soil-structure interaction model tests successfully (Pitilakis et al. 2008). A laminar soil container with final diameter and depth of 0.60 m, and 0.60 m, respectively, are designed and constructed for this study.

A soft clay soil was designed to provide soil medium for the shaking table testing considering required dynamic similarity characteristics. Accordingly, the maximum dry density, optimum moisture content, liquid limit, plastic limit, cohesion, angle of internal friction were determined to be 1.760 gm/cc, 17.20%, 26.69%, 5.481%, 0.46 Kg/cm² and 5°, respectively.

The shaking table tests have been carried out in three stages

- a Fixed-base condition,
- b End bearing pile foundations.

Displacement transducers (levels 1, 2, 3, and 4) and accelerometers (level 1, 2, 3, and 4) were installed on the structure in order to monitor the dynamic response of the structure and to primarily measure the structural lateral displacements. The recorded accelerations can be used to check the consistency and accuracy of obtained displacements through a double integration in time domain. The final setup of the tests for the fixed – base condition system on the shaking table shown in Figure 2.



Figure 2. Final setup of the shaking table tests for the structure with Fixed base condition

IV. PROBLEM FORMULATION

In present study, G+5 RCC framed structure located in Gandhidham city of Gujarat state of India (zone -V), is considered. Plan Size is 6 x 6 m with storey height 3m. The height of building is 1m. The depth pile foundation is 9m. Slab thickness is 150 mm. The beam size 230 mm x 450 mm (Over All) are used. The column size is 400mm x 400mm. Material M20 concrete and Fe415 steel are considered.

Time history of Bhuj 2001 earthquake. Fixed base condition and end bearing pile foundation models are small scale model with 1/15 scale ratio so they are analysis with scaled time history as per similitude rules.

V. RESULTS AND CONCLUSIONS

Accordingly, the maximum lateral deflection of the structure supported by end-bearing pile foundations is increased by 15% based on the experimental values to the fixed base structure. Thus, pile foundations reduce the lateral drifts in comparison to the shallow foundation case. This is due to the presence of stiff pile elements in the soft soil which increase the stiffness of the ground and influences the dynamic properties of the whole system such as the natural frequency and damping.

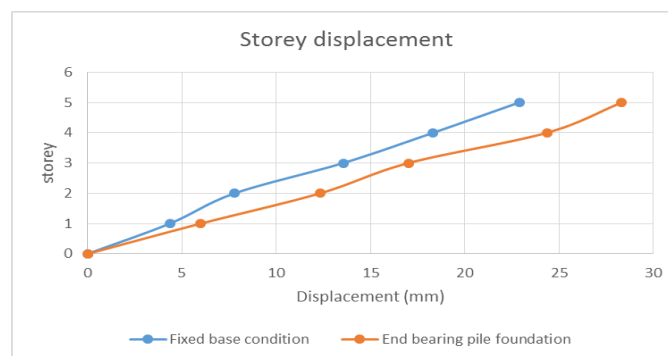


Figure 3. Average value of maximum lateral displacement

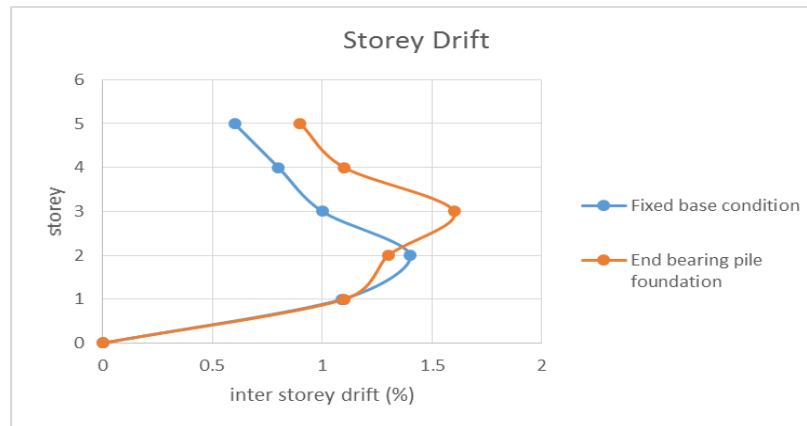


Figure 4. Aaverage experimental inter storey drift: (a) fixed base structure (b) structure supported on end baering pile foundation

VI. CONCLUSION

1. In this paper, conducted shaking table tests in this paper, soil-foundation-structure models were physically simulated with geometric scaling factor of 1:15.
2. According to the shaking table test results, the maximum lateral deflection of the five storey structure supported by end-bearing increases on average by 15% comparison to the fixed-base structure.
3. Therefore, comparing types of foundations, pile foundations increase the lateral displacements of the superstructure in comparison with the fixed base assumption.
4. Consequently, based on the conducted experimental investigations, considering the effects of the soil-pile-structure interaction can alter the dynamic characteristics of the superstructure, and ignoring the real deformability of the soil-pile system may affect the predicted damage level of structural and non-structural elements during earthquake as well as the lateral load carrying mechanism of soil-structure systems.

REFERENCES

- 1) Hokmabadi A.S., Fatahi B., Samali B "Seismic Response of Superstructure on Soft Soil Considering Soil-Pile-Structure Interaction" Proceedings of the 18th International Conference on Soil Mechanics and Geotechnical Engineering, Paris 2013.
- 2) N.A. Hosseinzadeh, F. Nateghi- A "Shake Table Study Of Soil Structure Interaction Effects On Seismic Response Of Single And Adjacent" 13th World Conference on Earthquake Engineering Vancouver, B.C., Canada August 1-6, 2004 Paper No. 1918
- 3) Peizhen Li , Hongmei Ren , Xilin Lu and Lei Cheng "Shaking Table Tests Of Dynamic Interaction Of Soil-structure Considering Soil Liquefaction" 14th World Conference on Earthquake Engineering October 12-17, 2008, Beijing, China.
- 4) Philip J MEYMAND, Michael F RIEMER "Large Scale Shaking Table Tests Of Seismic Soil-pile Interaction In Soft Clay. " 12th World Conference on Earthquake Engineering 2000.
- 5) Stewart J.P., Seed R.B., Fenves G.L. "Empirical evaluation of inertial Soil-Structure Interaction effects" PEER – 98107, 1998.
- 6) Wolf J.P. "Dynamic Soil-Structure Interaction" Prentice-Hall Englewood cliffs, NJ, 1985.
- 7) Clough R .W., Penzien J. "Dynamics of Structures" Mc Grow – Hill, Inc., 1993.
- 8) Matlock, H. (1970). "Correlations for Design of Laterally Loaded Piles in Soft Clay," Proceedings of 2nd Offshore Technology Conference., OTC 1204, Houston, Vol. 1, 577-594.
- 9) Meymand, P. (1998). "Shaking Table Scale Model Tests of Nonlinear Soil-Pile-Superstructure Interaction in Soft Clay," Ph.D. Dissertation, University of California, Berkeley.
- 10) BUDHU M. and DAVIES T. G. (1987), " Nonlinear analysis of laterally loaded piles in cohesion less soils" , Canadian Geotechnical Journal, vol.24 pp.289-296.
- 11) Chopra AK (199, "Dynamics of structures: theory and applications to earthquake engineering", Englewood Cliffs, NJ: Prentice-Hall.
- 12) BSSC. 1997. NEHRP Guidelines for the Seismic Rehabilitation of Buildings, 1997 Edition, Part 1: Provisions and Part 2: Commentary. In: Federal Emergency Management Agency. Carbonari, S., Dezi, F., and Leoni, G. 2011. Linear soil-structure interaction of coupled wall-frame structures on pile foundations. Soil Dynamics and Earthquake Engineering 3