



## Study of Process Parameters of Drilling Operation of Acrylic Using Design of Experiments (DOE)

Samir Jariwala

Darshan Parmar<sup>1</sup>, Shivam Patel<sup>2</sup>, Priyank Patel<sup>3</sup>, Devrajsinh Parmar<sup>4</sup>, Nishant Gajjar<sup>5</sup>

<sup>1, 2, 3, 4, 5</sup> Department of Mechanical Engineering, Shroff S.R Rotary Institute of Chemical Technology, Bharuch

### Abstract

*Drilling operation is the most commonly used machining operation that uses multipoint cutting tool called drill or drill bit to remove unwanted material for producing or enlarging desire hole. The present study is concerned on the examination of the process parameters of the drilling process on an acrylic. A statistical approach is used to analyze the experiment data and it is called as design of experiments (DOE). The technique minimizes the number of test required and maximizes the amount of reliable information. acrylic is used for the testing. There are three variation of drill bits and plate thickness are taken to examine the characteristics of thrust and torque at different speed. Such techniques for investigating variation in parameter can be used in improving manufactured quality and performance.*

**Keywords:** Process parameters, Drilling, Design of Experiment (DOE), Acrylic sheet, taguchi method

### I. INTRODUCTION

Drilling operation is the most commonly used machining operation that uses multipoint cutting tool called drill or drill bit to remove unwanted material for producing or enlarging desire hole. The main focused of modern machining industries on achievement of high quality, in term of work piece drilled accuracy and surface finish. The geometry of cutting tool, work materials, and parameters like cutting speed and feed directly affects drill performance. These parameters should be selected to optimize the drilling operation. So it can be achieved by function of drilling conditions using design of experiments (DOE).

Taguchi method is a statistical method developed by Taguchi and Konishi. Initially it was developed for improving the quality of goods manufactured (manufacturing process development), later its application was expanded to many other fields in Engineering, such as Biotechnology etc. Professional statisticians have acknowledged Taguchi's efforts especially in the development of designs for studying variation. Success in achieving the desired results involves a careful selection of process parameters and bifurcating them into control and noise factors. Taguchi Method involves identification of proper control factors to obtain the optimum results of the process. Orthogonal Arrays (OA) are used to conduct a set of experiments. Results of these experiments are used to analyze the data and predict the quality of components produced.

### II. LITERATURE REVIEW

Kompan Chomsamutr et al [1] researched on optimization parameters of tool life model using the Taguchi Approach and Response Surface Methodology.

They used RSM and Taguchi method to compare the cutting parameters of turning. It is found that by using both the methods and derived the mathematical model to cause the longest tool's life. Also they followed the procedure of Taguchi method and identify the performance characteristics (responses) to optimize and process parameters to control (test).

Md. Anayet u. Patwari et al [2] experimented on prediction and optimization of surface Roughness by coupled statistical and desirability analysis in drilling of mild steel. They adopted the Desirability function approach in order to find out the probability of the minimum surface roughness within the range predicted by response surface method. They focused on the surface roughness and also they found that the cutting parameters like spindle speed and feed has significant effect on surface roughness.

Mr. N.S Kurzekar et al. [3] carried out the optimization of drilling process parameters of aisi 304 austenite stainless steel by using response surface methodology. They researched on surface roughness as geometry of cutting tool, work materials, and parameters like cutting speed and feed directly affects drill performance. They also suggested that there are many research done on optimization techniques for process parameter for material removal rate and surface roughness. But they found that there is very little research done on drilling process parameter for aisi alloy steel.

C. O. Izelu et al. [4] experimented on response surface methodology in the study of induced machining vibration and work surface roughness in the turning of 41cr4 alloy steel. The examined induced vibrations and surface roughness of a tool-work-piece system in a turning process. From this study it is shown that induced vibration has significant effect on surface roughness of work-piece. The surface roughness of work piece is directly proportional to cutting tool acceleration. This effect interacts with other independent variables such as depth of cut, cutting speed and tool nose radius.

Ashutosh Kumar pandey et al. [5] experimented on optimization of the process parameters in micro-electric discharge machining using response surface methodology and genetic algorithm. These mathematical models using Response Surface Methodology (RSM) is used to correlate the response and the parameters. They found that the qualities required during micro hole drilling is to decrease the tool wear rate while drilling a micro-hole. Also the concluded that the tool wear rate can be considered as a measure of machining efficiency.

Parminderjeet Singh et al. [6] experimented on Optimization of Process Parameters of aisi Steel with Abrasive Assisted Drilling. The experiment conducted with abrasive slurry then the observations were made using Taguchi method. They observed the variation in MRR and surface roughness and then the optimized response variables were calculated. Also they found the overall improvement in surface finish & MRR through use of abrasives in comparison to the plain coolant is very promising which will lead to huge savings in the cost and improvement in quality.

Amarnath R. Mundhekar et al. [7] had given the review on Optimization of Drilling Process Parameters. It states that the to determine the region of critical process control factors such as drill diameter, material thickness and the drill point angle leading to desired output or responses with acceptable variations that will ensure a low cost of manufacturing through optimization. Also it has been found that the various cutting process parameters such as spindle speed, feed rate affects the material removal rate and the surface roughness is mostly affected by spindle speed, feed rate, type of drill & drill diameter. Woo Tze Keong et al. [8] states that while understanding and controlling the thrust force and drilling generated temperature, the RSM integrated models were validated and it resulted in a low percentage error delaminating factor estimation equation from drilling parameters. It is observed that Feed rate and thickness contributes significantly to the increase of thrust force, while feed rate significantly affects the drilling generated heat followed by thickness and spindle speed.

Panagiotis Kyratsis et al. [9] had generated the Drilling Mathematical Models Using the Response Surface Methodology. The result shows that at higher values of tool diameter both the thrust force and thrust force due to the action of the main cutting edges increase significantly. Also it was observed that when the cutting speed increases, the total force has a limited amount of change. It is only when the feed rate is increased together with the cutting speed that the total force has a small but observable decrease.

### **III. EXPERIMENTATION PROCEDURE**

#### **3.1 Design Of Experiments**

The Design of Experiments is considered as one of the most comprehensive approach in product/process developments. It is a statistical approach that attempts to provide a predictive knowledge of a complex, multi-variable process with few trials. Out of the numbers of methods we have selected the Taguchi method for the stated experiments.

#### **3.2 Taguchi Method**

The other methods require a large number of experiments to be carried out. It becomes laborious and complex, if the number of factors increase. To overcome this problem Taguchi suggested a specially designed method called the use of orthogonal array to study the entire parameter space with lesser number of experiments to be conducted. Taguchi thus, recommends the use of the special function to measure the performance characteristics that are deviating from the desired target value. The value of this function is further transformed into selected responses.

Taguchi method is based on given steps of planning, conducting and evaluating results of matrix experiments to determine the best levels of control parameters. Those steps are given as follows.

- Identify the performance characteristics (responses) to study and process parameters to control (test).
- Determine the number of levels for each of the tested parameters.
- Select an appropriate orthogonal array, and assign each tested parameters into the array.
- Conduct an experiment randomly based on the arrangement of the orthogonal array.
- Calculate the Thrust and Torque for each combination of the tested parameters.

- Analyze the experimental result and selection appropriate results.
- Graphical representation and observe the behavior of the each plot.

### 3.3 Test Specimen

The Radial drilling machine having capacity of 25mm with speed range 73-1800 rpm. The bench wise is attached to the Drill Tool Dynamometer. And finally, the dynamometer is connected to the computerized system having installed Drill tool force indicator.



**Fig.1 Experimental setup**

## IV. APPROACH TO THE EXPERIMENTAL DESIGN

In accordance with the steps that are involved in Taguchi's Method, a series of experiments are to be conducted. Here, drilling operation on acrylic components on a radial drilling machine has been carried out as a case study.

### 4.1 Control Factors

Factor	Control parameters	Levels			Units
		1	2	3	
1	Speed (V)	103	275	720	rpm
2	Drill diameter (d)	5	10	15	mm
3	Plate thickness (t)	6	8	22	mm

Table 4.1: Control parameters and their levels

The selected control parameters Speed (V), Drill diameter (d) and Plate thickness (t) and their levels are as shown in table 4.1. The generated Thrust and Torque are measured by the set up mentioned above. Experimentation has been carried out using their levels on an acrylic.

### 4.2 Selection of an orthogonal array

To select an appropriate orthogonal array for conducting the experiments, the degrees of freedom are to be computed. The same is given below:

Degrees of Freedom: 1 for Mean Value, and  
 $8 = (2 \times 4)$ , two each for the remaining

The total Degrees of Freedom = 9.

The most suitable orthogonal array for experimentation is L9 array as shown in Table 4.2. Therefore, a total nine experiments are to be carried out.

Table 2: Table of Taguchi designs (Orthogonal array L<sub>9</sub>)

Experiment Number	Control parameters levels		
	A	B	C
1	1	1	1
2	1	2	2
3	1	3	3
4	2	1	3
5	2	2	1
6	2	3	2
7	3	1	2
8	3	2	3
9	3	3	1

### 4.3 Conducting the Matrix Experiment

In accordance with the above OA, experiments were conducted with their factors and their levels as mentioned in table 4.3. The experimental layout with the selected values of the factors is shown in. Each of the above 9 experiments were conducted two times to get the error less results.

Table 4.3: Experimental layout based on an Orthogonal array L<sub>9</sub>

Experiment Number	Control parameters levels		
	A	B	C
	Speed (V)	Drill diameter (d)	Plate thickness (t)
1	103	5	6
2	103	10	8
3	103	15	22
4	275	5	22
5	275	10	6
6	275	15	8
7	720	5	8
8	720	10	22
9	720	15	6

## V. EXAMINE OF DATA

The following are the experimental results of the work carried out.

### 5.1 Experimental Data

The experiment has been performed using above three factors with their levels and conducted the two separate experiments for each of the factors. The Torque and Thrust were measured for them. Since, we want the accurate value; we have taken average of both experiment and calculated the average Torque and average Thrust.

Table 5.1: Experimental Results (Average Torque and Thrust)

Experiment Number	Average Torque (Nm)	Average Thrust (N)
1	0.98	156.9
2	1.47	220.64
3	0.98	132.36
4	0.5	68.64
5	0.98	117.67
6	0.5	65.2
7	0.5	49.1
8	0.98	73.55
9	0.5	24.51



**Fig 2. Final product**

This is the final picture of the acrylic sheet after the different operation using the types of drill bits, thickness and speed of the drilling machine.

## 5.2 Graphical Observation

The plot of the control parameters speed, drill diameter and plate thickness versus their generated Torque and Thrust with their different levels are described below.

The observation has been made on the basis of their behavior on the plots. The nature of their performance are observed and used to predict their nature for the future work. The given observation is taken for the  $L_9$  orthogonal array on acrylic.

### 5.2.1 Effect on Thrust

#### Thrust→ Speed:

At the initial stage of drilling, the maximum thrust force is produced. As the drilling speed is increased the thrust force generated is gradually decreased. The same nature is observed for all three level for the given array for acrylic.

#### Thrust→ Drill diameter:

As shown in this graph, as the drill diameter is increased the thrust force also generated simultaneously. So in case of drill diameter the friction between the surfaces increased and hence the thrust generated is increased.


#### Thrust→ Plate thickness:

The behavior on varying plate thickness is uncertain. For the lower speed, as generated thrust increase up to certain thickness, the after it gradually decreases.

For moderate speed, thrust force gradually decreased as increase plate thickness.

For the high speed, generated thrust gradually increased as increase plate thickness.

### **Effect on thrust**

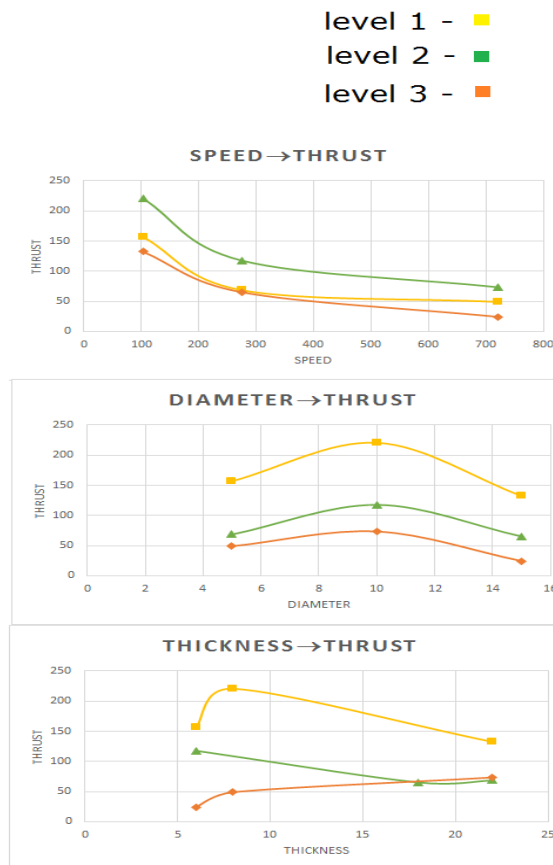

#### **5.2.1 Effect on Torque**

##### **Torque → Speed:**

At the initial of drilling at low speed maximum thrust produced, as the speed increased the thrust force gradually decreased.


##### **Torque → Drill diameter:**

As shown in the graph, in case of drill diameter; as it increases the torque increase. But after moderate level, it remains constant or may increases.


## **Effect on Torque**

level 1 - ■  
level 2 - ■  
level 3 - ■


**SPEED → TORQUE**

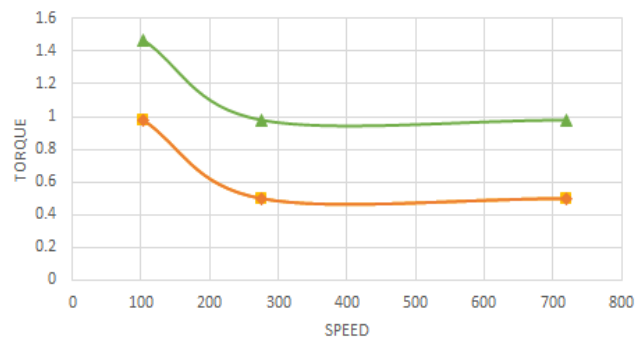

**DIAMETER → TORQUE**

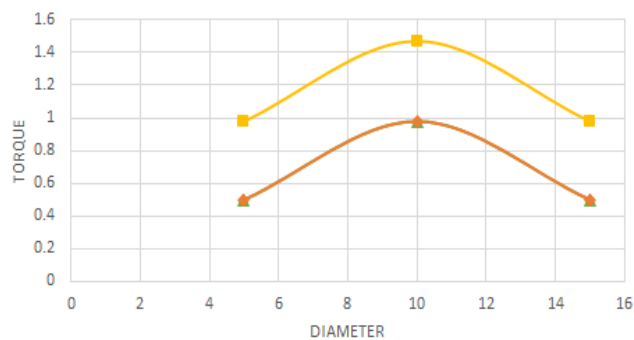

**THICKNESS → TORQUE**

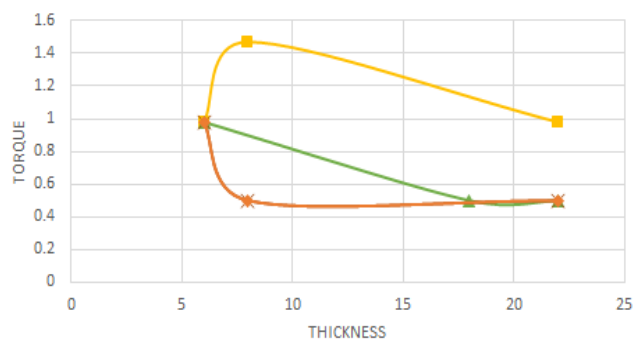



**Torque→ Plate thickness:**

Similarly in case of the plate thickness, the behavior of the torque is uncertain.

For low speed, the torque generated increasing with the plate thickness. Because if the thickness increases, the friction between the drill bit and work piece also increases.

For moderate the behavior was observed opposite than for lower speed up to some range. Afterward the Torque decreases for moderate speed while increasing plate thickness.

For higher speed, if the plate thickness increases the torque generated also increases.

## **I. RESULT AND CONCLUSION**

The paper illustrates the application of the parameter design (Taguchi method) to examine the effects of the process parameters of drilling operation. The following conclusions can be drawn based on above experiment results of this study:

- Taguchi's method of parameter design can be performed with the lesser number of experiments as compared to other methods.
- For low drilling speed, if the plate thickness and drill diameter are higher than the maximum torque and thrust are generated.
- For higher drilling speed, if the plate thickness and drill diameter are lower than the minimum torque and thrust are generated.
- Uncertain behavior of the thrust and torque is observed while changing the plate thickness.

## **II. REFERENCES**

- [1] Kompan chomsamutr, somkiat jongprasithpor, Optimization parameters of tool life model using the Taguchi approach and response surface methodology IJCSI International Journal of Computer Science Issues, Vol. 9, Issue 1, No 3, January 2012.
- [2] Md. Anayet u. Patwari, s.m. Tawfiq ullah, ragib ishraaq khan, md. Mahfujur rahman., Prediction and optimization of surface roughness by coupled statistical and desirability analysis in drilling of mild steel, international journal of engineering, 2013.
- [3] Mr. N.s.kurzekar, prof m.s. tufail., Optimization of drilling process Parameters of aisi 304 austenite stainless steel by Using response surface methodology, International Journal of Engineering Development and Research, 2016.
- [4] C. O. Izelu, S. C. Eze, B. U. Oreko, B. A. Edward, D. K. Garba, Response surface methodology in the study of induced machining vibration and work surface roughness in the turning of 41cr4 alloy steel, International Journal of Emerging Technology and Advanced Engineering, Volume 3, Issue 12, December 2013.
- [5] Ashutosh Kumar Pandey, Kamlesh Tiwari, Abhay Kumar Dubey, Optimization of the process parameters in micro-electric discharge machining using response surface, International Journal of Scientific and Research Publications, Volume 4, Issue 9, September 2014.
- [6] Parminderjeet Singh, Kamaljeet BhambOptimization of process parameters of aisi d3 steel with abrasive assisted drilling, International Research Journal of Engineering and Technology (IRJET), Volume: 03 Issue: 04, 2016.
- [7] Amarnath r. Mundhekar, subhash r. Jadhav, Optimization of drilling process parameters: a Review, International Journal for Research in Applied Science & Engineering Technology (IJRASET), Volume 3 Issue II, February 2015
- [8] Woo Tze Keong, Faiz Ahmad, Safian Sharif, Mohd Azuwan Moinser Response surface methodology integrated modeling of glass fiber reinforced polymer delamination in high speed drilling, ARPN Journal of Engineering and Applied Sciences, VOL. 11, NO. 6, MARCH 2016.
- [9] Panagiotis kyratsis, nikolaos taousanidis, apostolos tsagaris, konstantinos kakoulis, drilling mathematical models using the response surface methodology, International Journal of Mechanical & Mechatronics Engineering IJMME-IJENS Vol:15 No:06.